

CL-Inox Fully Powered Stainless Stacker

- Model CL-Inox, capacity 1200kg
- Available with lifting heights from 1700mm to 3200mm.
- The CL-Inox fully powered stainless stacker is ideal for wet, aggressive and clean environments in the food and pharmaceutical industries.
- It is designed to work in environments with severe hygiene demands and environments where it is exposed to thorough cleaning as well as low temperatures. It helps minimise the risk of bacterial contamination.
- The CL-Inox lifts, transports and stacks goods in very confined areas in temperatures down to -30°C .
- It is very manoeuvrable and optimises space utilisation in storage and production areas.
- Long operating life and low maintenance costs through ingress protection-IP54, strong and solid construction and steel type EN1.4301
- Top flexibility through being highly manoeuvrable, optimum utilisation of space, operating down to 30°C and the option of initial lifting.
- All electronic parts and the motor have watertight casings.

CL-Inox



Model	CL-Inox			
Capacity	Kg	1200	1200	1200
Lifting height with wrap-over forks (h3)	mm	1700	2400	3200
Fork length (l)	mm	1120-1600		
Overall height (h1)	mm	2000	1700	2100
Overall width (b1)	mm	850		
Fork span (b5)	mm	560, 680		
Length without forks (l2)	mm	615		
Overall length (l1)	mm	615 + l		
Lowered height, forks (h13)	mm	85		
Load centre (c)	mm	l/2		
Fork width (e)	mm	180		
Run-in length (lx)	mm	850 v/1120 fork length		
Wheelbase (l=1120)	mm	1125		
Gangway	mm	2170 (pallet: 1200 x 800)		
Free lift (h2)	mm		160	
Height of handle (h14)	mm	1560		
Turning angle of the wheels		180°		
Turning radius Wa (l=1120)		1320		
Motor		24 V 0.8 kW		
Driving speed with/without load		4.0/5.5 km/h electronically variable		
Pump motor		24 V 2.2 kW		
Lifting speed with/without load		0.07/0.12 m/s		
Lowering speed with/without load		0.12/0.2 m/s		
Weight with 1120mm forks (no battery)	Kg	505	585	625

Features




Central location of all control buttons



A.C. Technology



The key switch is placed in a watertight box

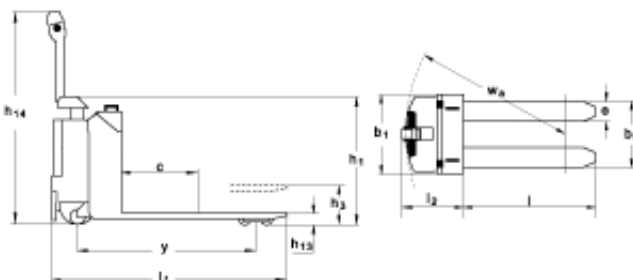



Tel: 01525 717174
Fax: 01525 717140

info@hesales.co.uk
www.hesales.co.uk