


# ITBC06 Counterbalanced Stacker

The ITBC06 is lighter duty, counterbalanced stacker for use with all pallet types.


- Capacity 600 Kg (to lift height 1600mm).
- Lift heights 1600 or 3000 mm.
- The 1600 model has a slim line simplex mast, whilst the 3000 mm model has a high visibility, duplex mast.
- Adjustable fork spread to handle all pallet types.
- Uses latest AC control technology for superior control and battery life
- Built-in battery charger means that the truck can be charged from any convenient mains socket.
- Ergonomic drive controls.
- Smooth stepless drive controls with microprocessor control.
- Trucks carry CE mark and comply with all current safety legislation.

# ITBC06

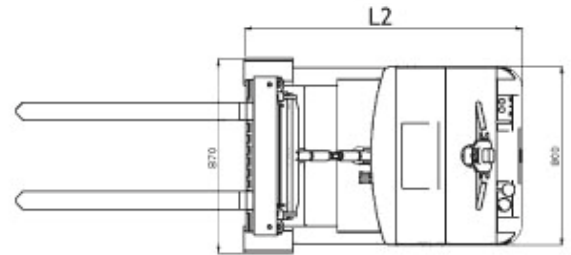


Model		ITBC 06.16	ITBC 06.30
Capacity To 1600 mm	Kg	600	
At Load Centre	mm	500	
Wheels		Polyurethane.	
Lift Height (h1)	mm	1600	3000
Freelift (h5)	mm	1390	-
Closed Mast Height (h2)	mm	1970	2095
Open Mast Height (h3)	mm	2180	3580
Speeds Laden/unladen	Drive Km/h	Km/h	4.6 / 5.8
	Lift cm/sec	Cm/sec	8 / 10
	Lower cm/sec	Cm/sec	10 / 8
Maximum Gradient Laden / Unladen	%	7 / 10	
Wheels	Load Roller	mm	150 x 60
	Drive Wheel	mm	250 x 80
Brake		Electromagnetic.	
Battery	V / Ah	24 / 160	
Charger	V / A	24 / 30 (Built-in)	
Drive Motor	kW	0.8 A.C.	
Lift Motor	kW	2.2	
Truck Weight With Battery	Kg	900	1060
Capacity To Full Lift Height	Kg	600	400

## Options

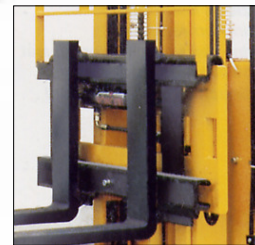

Sideshift

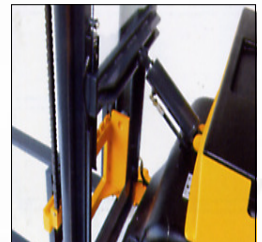

Tilting Mast



Slimline Simplex Mast

- Higher lift capacities available including 1000kg, 1200kg + 1500kg (ITBC10, ITBC12 + ITBC15)

- Available with optional, tilting mast. (See options above)  
Other standard lift heights available including 2400mm + 2800mm and other specials

## H.E.S

HANDLING EQUIPMENT SALES LTD.

Tel: 01525 717174  
Fax: 01525 717140

info@hesales.co.uk  
www.hesales.co.uk