

RECORD

Materials Handling Equipment



Ergonomic handle ensures the user a relaxed hold.

LFS Manual Stacker with Straddle


- Model LFS, Capacity 1000Kg
- Available in lift heights 600, 800, 1067, 1150 + 1520.
- The LFS with straddle legs transports, lifts and handles goods on all types of pallets—also closed pallets. Large range of optional extras ensures optimum flexibility.
- The design puts focus on the safety and ergonomic working conditions of the user - LFS can be adjusted to the individual user.
- Optimum utilisation of the space - LFS has a compact construction and is very manoeuvrable.
- Optimum safety for the user through central location of all control buttons on the handle, transparent and impact-resistant safety screen on the mast and location of parking brake.
- Strong construction ensures a long operating life and low maintenance costs.
- Also available with electric lifting (ELFS).

LFS



Model	LFS								
Capacity	Kg	1000							
At Load Centre	mm	l / 2							
Lifting Height with wrap over forks (h3)	mm	890	1170	1370	1570	1880	2020	2420	
Fork Length (l)	mm	600*, 800*, 1067, 1150, 1520**							
Overall Height (h1)	mm	1330	1530	1730	1930	2240	1530	1730	
Overall Width (b1)	mm	166 + b4							
Fork Span min./max. (b5)	mm	Wrap-over: 350/800, chisel and bar: 230/680							
Length without forks (l2)	mm	415							
Overall Length with 1150 forks	mm	1680 1690							
Overall Height (h4)	mm	Without telescopic mast 2490 2890							
Lowered Height, forks (h13)	mm	Chisel: 45, bar: 65, wrap-over: 65							
Width between legs (b4)		850-942, 942-1124, 1124-1306, 1240-1422****							
Fork Width (e)	mm	Chisel: 100, bar: 65, wrap-over: 163							
Run-in length	mm	1080 with 1150 1067 mm forks							
Gangway (pallet: 1200 x 800)	mm	2190*****							
Free Lift (h2)	mm	190							
Turning angle of the wheels	degrees	180°							
Lifting Speed		Normal/quick: 8/26 mm per pump							
Lowering speed with/without load		Max. 0.19 m/s / max. 0.07 m/s							
Weight without battery	Kg	254	273	280	284	292	334	342	

Options

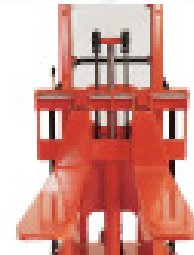


Adjustable forks are available as optional extra in many different lengths and types



Available with side-tilting forks and/or optional extras, e.g drum turner, crane arm, spear, remote control, level control.

* Maximum lifting height 1570mm with 600mm forks, maximum lifting height 2420mm with 800mm forks.
 ** Reduced capacity 750kg. Not available for 1200kg models.
 *** 1200Kg models are only available with chisel forks.
 **** Width between straddle legs of more than 1306mm. Max capacity 800kg. Fork length of 1520 mm is not recommended.
 ***** Tests show that 1700mm is enough—depends on width between straddle legs.

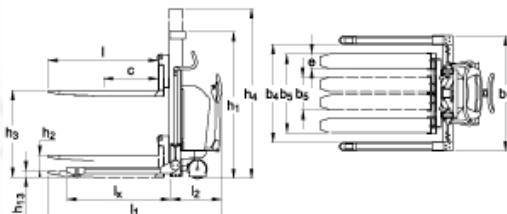



H.E.S

HANDLING EQUIPMENT SALES LTD.



Tel: 01525 717174

Fax: 01525 717140

info@hesales.co.uk



www.hesales.co.uk