


RFP Fully Powered Stacker

- Model RFP, Capacity 1000kg
- Available in lift heights 920mm + 1650mm
- The RFP offers high flexibility and efficiency. It can lift, transport and handle many different goods.
- The design puts focus on the safety and ergonomic working conditions of the user - RFP can be adjusted to the individual user
- The RFP has optimum driving qualities and manoeuvrability even in the most confined areas.
- Optimum safety for the user through transparent and impact-resistant safety screen on the mast and reduced driving speed in raised position
- High Performance with AC technology. Easy setting of e.g. driving speed, acceleration and deceleration. Strong construction ensures a long operating life and low maintenance costs.
- Also available with Straddle legs (RFPS).



RFP


Options



Adjustable forks are available as optional extra in many different lengths and types.



Available with side-tilting forks and/or optional extras, e.g. drum turner, crane arm, spear, remote control, level control.

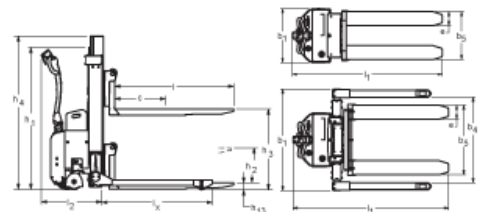

Model		RFP		RFPS	
Capacity	Kg	1000	1000	1000	1000
At Load Centre	mm	1 / 2			
Lifting Height (h3)	mm	920	1650	890	1620
Fork Length	mm	600, 800, 1150, 1520*			
Overall Height (h1)	mm	1320	1350	1320	1350
Overall Width (b1)	mm	635, 710		166+b4	
Fork Span (b5)	mm	560, 680		Minimum 300/800, 230/680 Maximum	
Length without forks (l2)	mm	545		590	
Overall Length with 1150 forks	mm	1755	1765	1855	1865
Overall Height (h4)	mm	1320	2025	1320	1995
Lowered Height, forks (h13)	mm	90			
Fork Width (e)	mm	163			
Run-in length	mm	1040 with 1150 mm forks			
Straddle width (b4)	mm			850-942, 942-1124, 1124-1306, 1240-1420	
Gangway (pallet: 1200 x 800)	mm	2200 - tests show that 1700mm are enough			
Free Lift (h2)	mm			330	
Turning angle of the wheels	degrees	210°			
Motor		0.7 kW 24 V speed control electronically variable			
Driving speed with/without load		Below 500mm lift: 5.2/5.5 km/h, over 500mm lift: 3/4 km/h			
Pump Motor		1.2 kW 24V			
Lifting Speed with/without load		0.07/0.12 m/s			
Lowering speed with/without load		0.12 m/s / 0.07 m/s			
Weight without battery	Kg	308	363	348	403

* Reduced Capacity 750kg



H.E.S

HANDLING EQUIPMENT SALES LTD.



Tel: 01525 717174

Fax: 01525 717140



info@hesales.co.uk
www.hesales.co.uk