

RFPmx Fully Powered Stacker


RFPmx

- Model RFPmx, Capacities 1000 + 1200Kg
- Available in lift heights 920, 1200, 1400, 1600, 1910, 2050, 2450, 2850 + 3300mm.
- The RFPmx offers high flexibility and efficiency. It can lift, transport and handle many different goods.
- The design puts focus on the safety and ergonomic working conditions of the user - RFPmx can be adjusted to the individual user
- The RFPmx has optimum driving qualities and manoeuvrability even in the most confined areas.
- Optimum safety for the user through transparent and impact-resistant safety screen on the mast and reduced driving speed in raised position
- High Performance with AC technology. Easy setting of e.g. driving speed, acceleration and deceleration. Long operating time per charge.
- Strong construction ensures a long operating life and low maintenance costs.
- Also available with Straddle legs



Possible to operate with the handle up-right. Central location of all control buttons.


Options



Adjustable forks are available as optional extra in many different lengths and types.



Available with side-tilting forks and/or optional extras, e.g drum turner, crane arm, spear, remote control, level control.

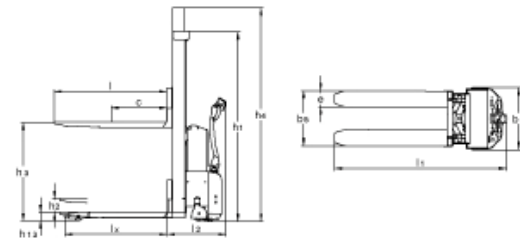

Model	RFPmx										
Capacity	Kg	1000/1200	1000/1200	1000/1200	1000/1200	1000	1000	1000*	1000	1000*	1000*
At Load Centre	mm	1 / 2									
Lifting Height (h3)	mm	920	1200	1400	1600	1910	2050	2450	2450	2850	3300
Fork Length	mm	600**, 800**, 1150, 1520***									
Overall Height (h1)	mm	1330	1530	1730	1930	2240	1530	1730	1730	1930	2240
Overall Width (b1)	mm	635								890	
Fork Span (b5)	mm	480****, 560, 680		560, 680							
Length without forks (l2)	mm	605									
Overall Length with 1150 forks	mm	1755					1765				
Overall Height (h4)	mm	Without telescopic mast					2490	2890	2890	3290	3740
Lowered Height, forks (h13)	mm	90									
Fork Width (e)	mm	163									
Run-in length	mm	1040 with 1150 mm forks									
Gangway (pallet: 1200 x 800)	mm	2200 - tests show that 1700mm are enough									
Free Lift (h2)	mm									190	
Turning angle of the wheels	degrees	210°									
Motor		1.2 kW 24 V speed control electronically variable									
Driving speed with/without load		Below 500mm lift: 5/6 km/h, over 500mm lift: 3/4 km/h									
Pump Motor		1.2 kW 24V									
Lifting Speed with/without load		Cap. 1000kg: 0.07/0.12 m/s, cap. 1200kg: 0.04/0.07 m/s									
Lowering speed with/without load		0.12 m/s / 0.07 m/s					0.12 m/s / 0.08 m/s				
Weight without battery	Kg	351	370	376	380	388	431	438	445	454	468

* Load reduction at large lifting height
 ** Maximum lifting height 1600mm with 600mm forks, maximum lifting height 2450mm with 800mm forks
 *** Reduced capacity 750kg. Not available for 1200kg models
 **** Only for 1000kg models



H.E.S

HANDLING EQUIPMENT SALES LTD.



Tel: 01525 717174

Fax: 01525 717140



info@hesales.co.uk
www.hesales.co.uk