

RFPmx S Fully Powered Stacker with Straddle


RFPmx S



Possible to operate with the handle upright. Central location of all control buttons.

- Model RFPmx S, Capacities 1000 + 1200Kg
- Available in lift heights 870, 890, 1150, 1170, 1350, 1370, 1550, 1570, 1880, 2020, 2420, 2820 and 3270mm.
- The RFPmx S offers high flexibility and efficiency. It can lift, transport and handle many different goods. All types of pallets - also closed pallets - can be handled.
- Straddle legs make it possible to handle many different pallet types.
- The design puts focus on the safety and ergonomic working conditions of the user - RFPmx S can be adjusted to the individual user.
- The RFPmx S has optimum driving qualities and manoeuvrability even in the most confined areas.
- Optimum safety for the user through transparent and impact-resistant safety screen on the mast and reduced driving speed in raised position.
- High Performance with AC technology. Easy setting of e.g. driving speed, acceleration and deceleration. Long operating time per charge.
- Strong construction ensures a long operating life and low maintenance costs.
- Also available without Straddle legs (RFPmx).


Options

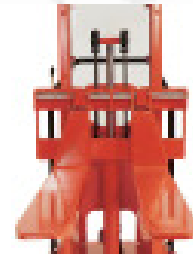

Adjustable forks are available as optional extra in many different lengths and types.



Available with side-tilting forks and/or optional extras, e.g drum turner, crane arm, spear, remote control, level control.

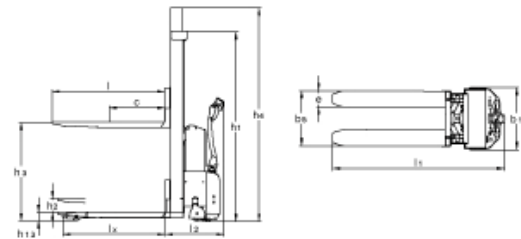

Model	RFPmx S										
Capacity	Kg	1000/1200	1000/1200	1000/1200	1000/1200	1000	1000	1000	1000	1000	
At Load Centre	mm	l / 2									
Lifting Height (h3)	mm	890/870	1170/1150	1370/1350	1570/1550	1880	2020	2420	2820	3270	
Fork Length	mm	600*, 800*, 1067, 1150, 1520**									
Overall Height (h1)	mm	1330	1530	1730	1930	2240	1530	1730	1930	2240	
Overall Width (b1)	mm	166 + b4									
Fork Span min./max. (b5)	mm	Wrap-over: 350/800, bar and chisel: 230/680 (1200kg models are only available with chisel forks)									
Length without forks (l2)	mm	703									
Overall Length with 1150 forks	mm	1855					1865				
Overall Height (h4)	mm	Without telescopic mast					2490	2890	3290	3740	
Lowered Height, forks (h13)	mm	Chisel: 45, bar: 65, wrap-over: 65									
Width between legs: Cap. 1000/1200kg	mm	850-942, 942-1124, 1124-1306, 1240-1422***/850-942, 942-1124									
Fork Width (e)	mm	Chisel: 100, bar: 100, wrap-over: 163									
Run-in length	mm	967 by 1150 and 1067 fork length									
Gangway (pallet: 1200 x 800)	mm	2200 - tests show that 1700mm are enough - depends on width between straddle legs									
Free Lift (h2)	mm									190	
Turning angle of the wheels	degrees	210°									
Driving Motor		1.2 kW 24 V speed control electronically variable									
Driving speed with/without load		Below 500mm lift: 5/6 km/h, over 500mm lift: 3/4 km/h									
Pump Motor		1.2 kW 24V									
Lifting Speed with/without load		Cap. 1000kg: 0.07/0.12 m/s, cap. 1200kg: 0.04/0.07 m/s									
Lowering speed with/without load		0.12 m/s / 0.07 m/s					0.12 m/s / 0.08 m/s				
Weight without battery	Kg	411	430	436	440	448	491	498	507	521	

* Maximum lifting height 1570mm by 600mm fork length, maximum lifting height 2420 by 800mm fork length.
 ** Reduced capacity 750kg. Not available for 1200kg models.
 *** Width between straddle legs of more than 1306mm: Max. capacity 800kg. Fork length of 1520mm is not recommended.



H.E.S

HANDLING EQUIPMENT SALES LTD.



Tel: 01525 717174
Fax: 01525 717140

info@hesales.co.uk



www.hesales.co.uk

